

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date

Viso LightSpion - Seriennummer: 1435906163 Sensorseriennumm
LightSpion – Type C, horizontal
11.06.2026

Measurement Conditions

Tested c-planes
Tested gamma resolution
Input Power
Input RMS Voltage and Current

2 planes – 180.00°
7.50°
0 W
0 V – 0.10 A

Tested Light Source

Luminaire
Item No.
Manufacturer
Measured length
Dimension (Lamp w x h) | (Light w x h)
Description

FLEX STRIP HEP-1200 MONO 21.6W WW 5m 260506
AS12HEP2106
awLed by audiowerk GmbH
5000mm
10mm x 5000mm | 3.5mm x 2.8mm
Charge: 260506


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index
Ecodesign Energy Class

13.38 lm – 2.031% / 97.97% -> 2675 lm/m
∞ lm/W
4273 cd
3000 K
CRI 92.5
A

Polar light distribution diagram

Unit: 0-100% of peak intensity

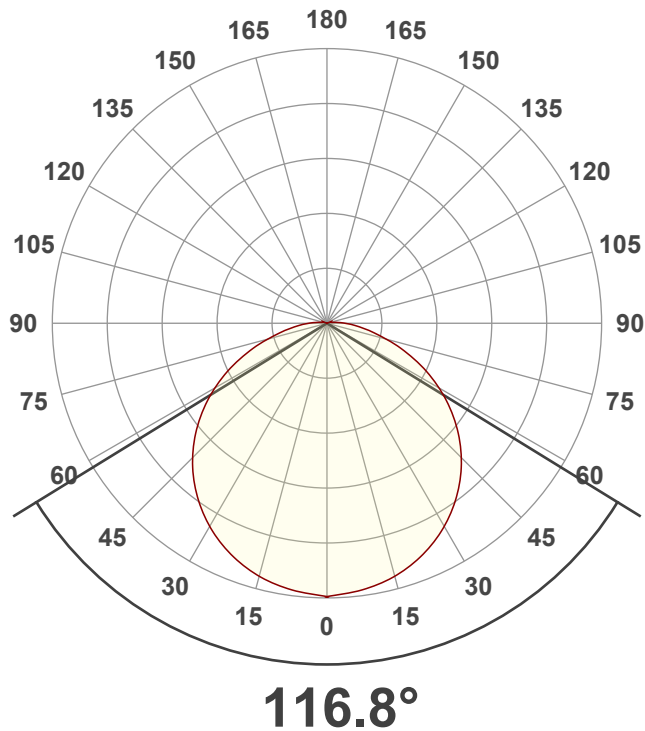


— C0 - C180
— C90 - C270

$\eta = 100\%$

Product photo




Spectral power distribution

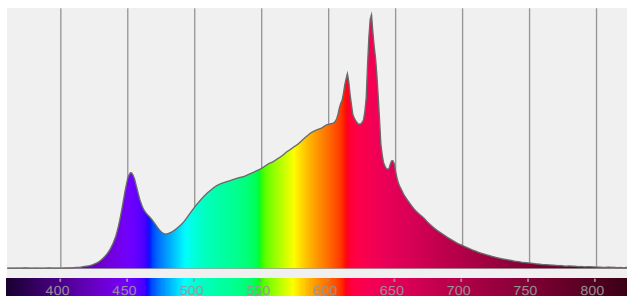

Luminous Intensity diagram

Unit: 0-100% of peak intensity

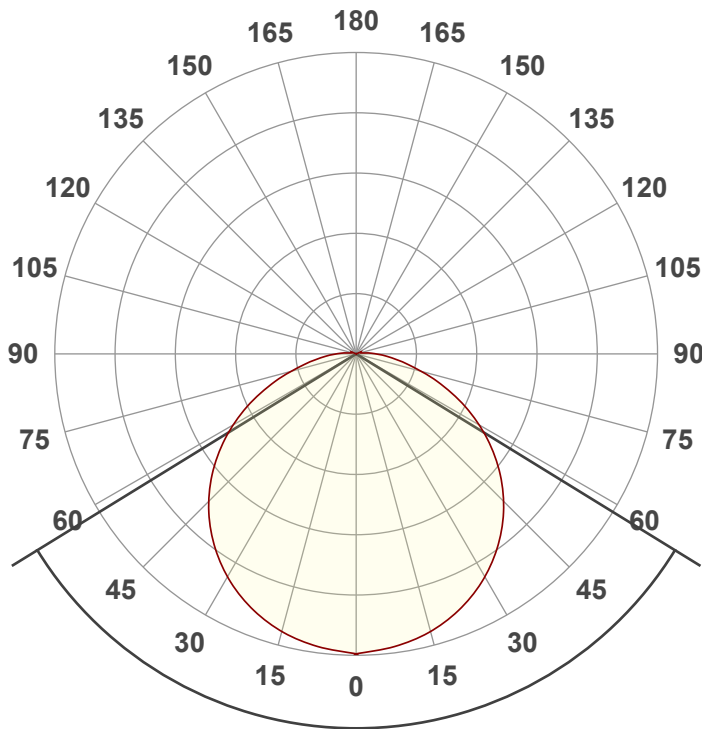

C0-C180
C90-C270

116.8°

Main Values

Output (total Lumen)	13.38 lm
Lumen Up% / Down%	2.031% / 97.97%
Peak Intensity	4273 cd
Beam Angle (50%-FWHM)	116.8°

EU Ecodesign parameters


Directionality (DLS or NDLS)	NDLS
Ecodesign Useful Luminous Flux	13.38 lm
Ecodesign Energy Class	A

Intensity Ratio

In 120° cone	74.14%
In 90° cone	49.71%

Linear distribution diagram

Intensity [cd]

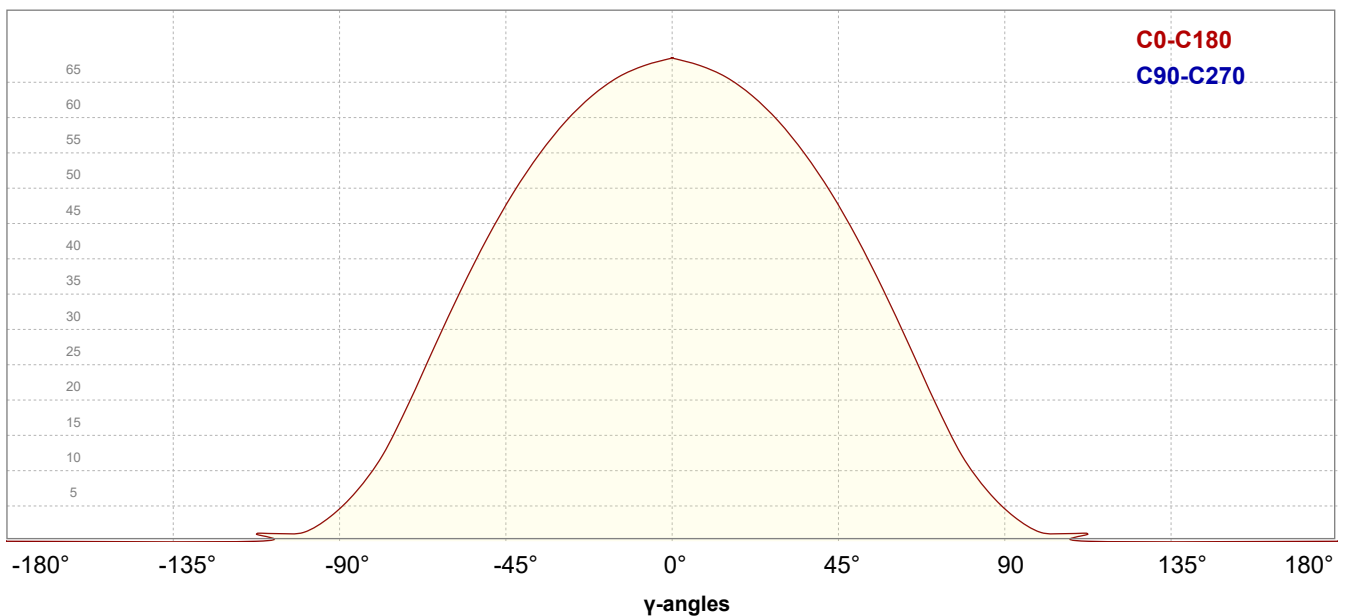

C0-C180
C90-C270

Color details


Correlated Color Temperature, Target
 Correlated Color Temperature, Measured
 Color Rendering Index
 Color Rendering Index, R9 (red)
 Color Rendering TM30-18

CCT = 3000 K
 CCT = 3026 K
 CRI 92.5
 R9 = 51.0
 Rf 90.6
 Rg 98.7


MacAdam Steps
 Color deviation from BBL
 Color coordinates CIE 1931
 Color coordinate CIEs 1960
 Color coordinate CIEs 1976
 Color Quality Scale

SDCM = 1.2
 Duv = -0.0006
 (x;y) = (0.4372;0.4042)
 (u;v) = (0.2507;0.3476)
 (u';v') = (0.2507;0.5215)
 CQS = 90.2

CIE 1931 Chromaticity diagram

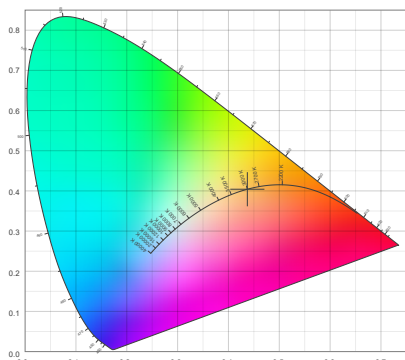


CIE 1931 Chromaticity - zoomed

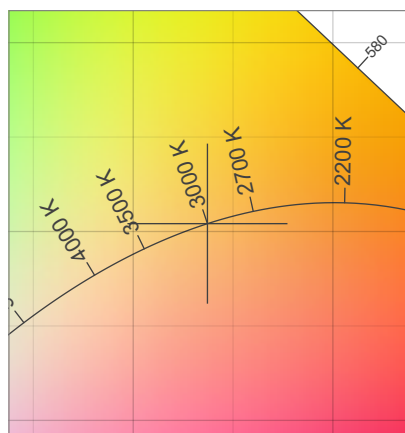


CIE 1931 Chromaticity - SDCM



Spectral power distribution

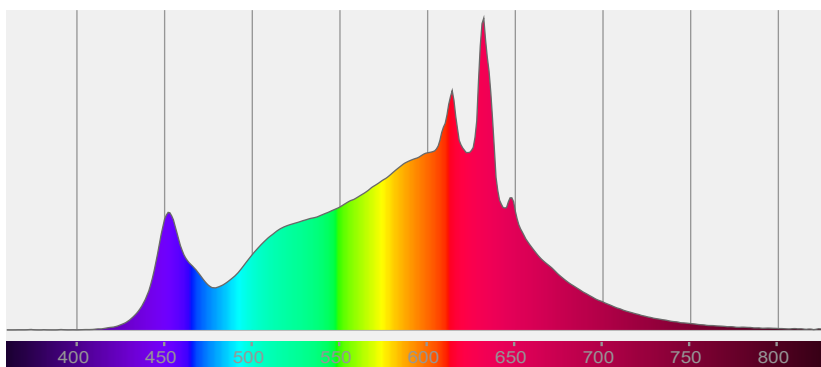


Color Rendering Index per reference color (CIE 1995)

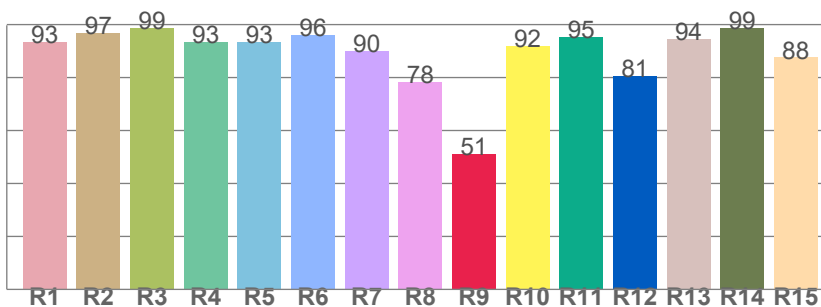

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.4	96.9	98.6	93.5	93.2	96.0	89.9	78.4	51.0	91.8	95.4	80.6	94.4	98.8	87.5

TM30-18 Rf-values per hue bin

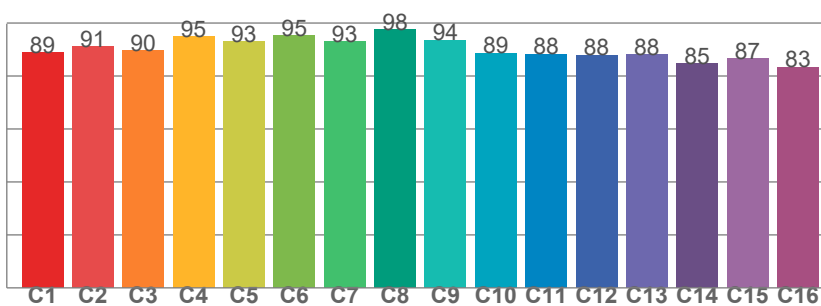


TM30-18 Rf-values per hue bin


C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
88.8	91.3	89.6	95.0	93.1	95.4	93.0	97.7	93.6	88.7	88.3	88.0	88.1	84.8	86.7	83.4

Color details - ANSI/IES TM-30-18 Color Rendition Report

Color Vector Graphic

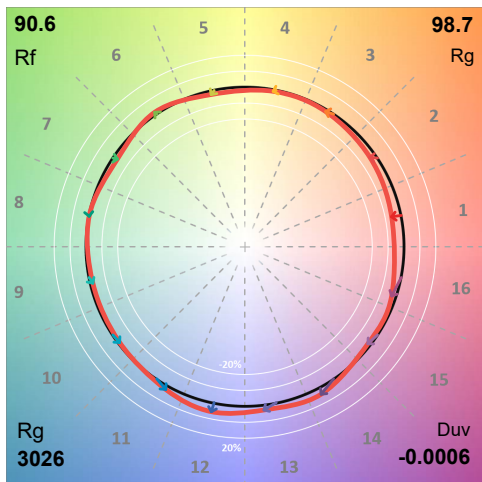

Color Rendition by Color Evaluation Sample (CES)

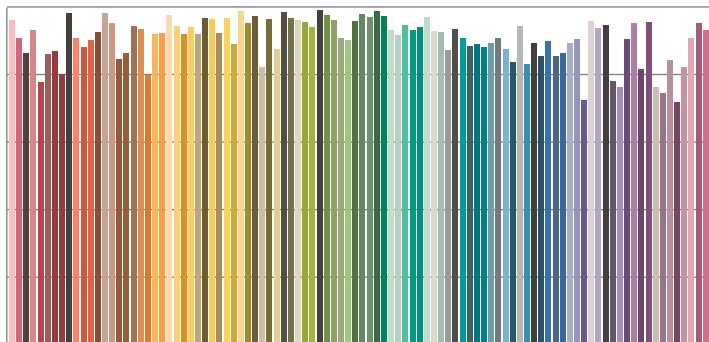


Color evaluation sample CES01 through CES99

Color Distortion Graphic




Local Color Fidelity (per hue bin)

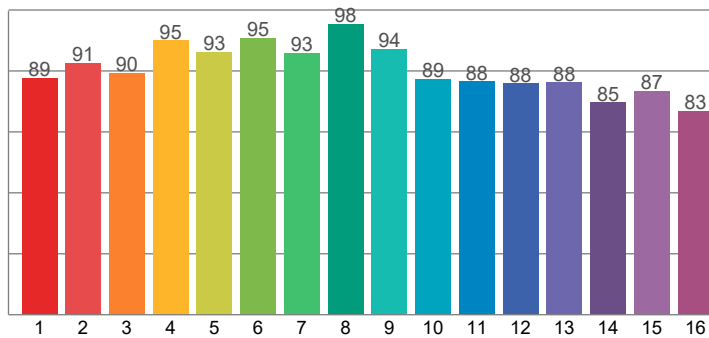


Hue angle bin (j)

Local Chroma Shift (per hue bin)

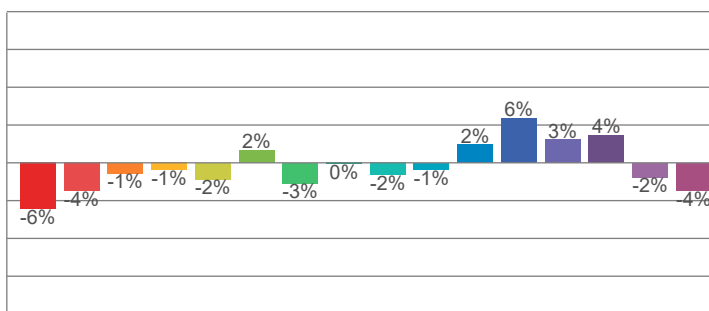

Hue angle bin (j)


Gamut Index vs. Fidelity Index

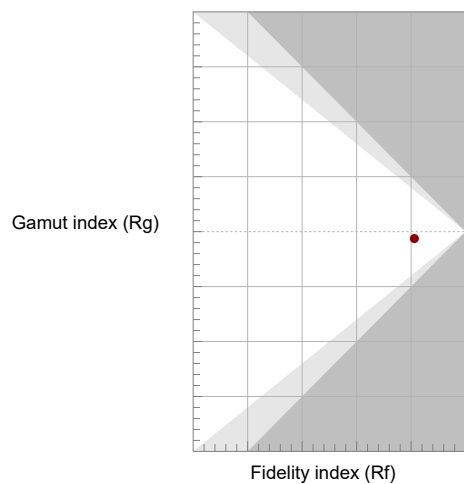

CIE x 0.4372
 CIE y 0.4042
 CIE u' 0.2507
 CIE v' 0.5215


CIE	13.3-1995
Ra	92.5
R9	51.0

Beam details

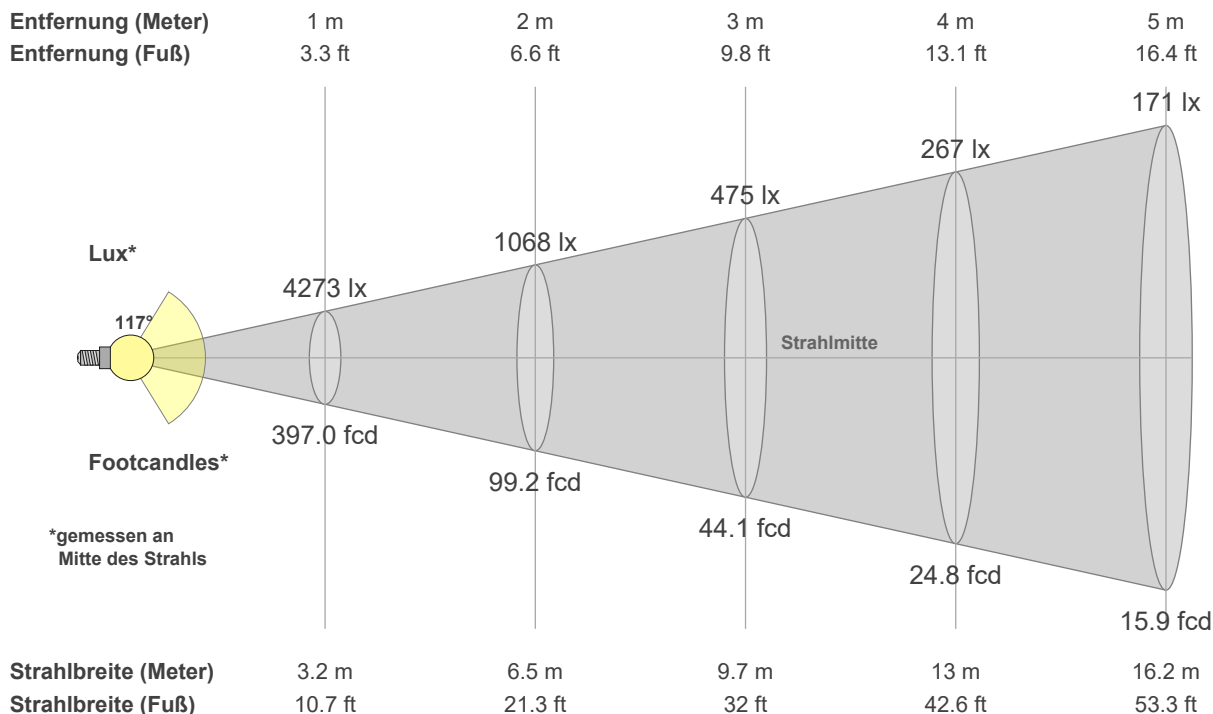

Luminaire budgetary diagram

LAMPS (number of lamps)

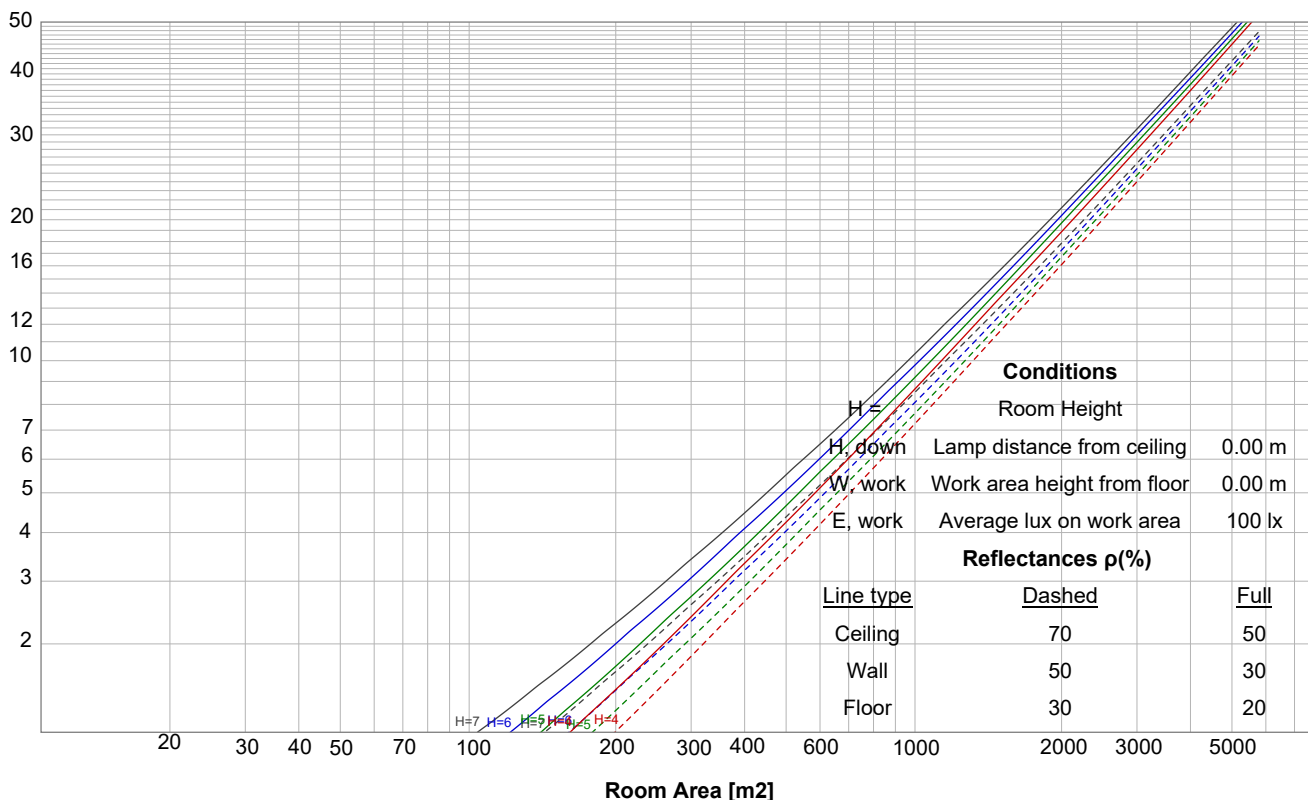

Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
4273	1068	475	267	171	119	87	67	53	43	35	30	25	22	19	17	15	13	12	11	lux
397	99.2	44.1	24.8	15.9	11	8.1	6.2	4.9	4	3.3	2.8	2.3	2	1.8	1.6	1.4	1.2	1.1	1	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4273	4233	4174	4098	3981	3837	3667	3465	3229	2969	2684	2361	2023	1672	1312	978	687	461	297	169	cd
100%	99%	98%	96%	93%	90%	86%	81%	76%	69%	63%	55%	47%	39%	31%	23%	16%	11%	7%	4%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4273	4233	4174	4098	3981	3837	3667	3465	3229	2969	2684	2361	2023	1672	1312	978	687	461	297	169	cd
100%	99%	98%	96%	93%	90%	86%	81%	76%	69%	63%	55%	47%	39%	31%	23%	16%	11%	7%	4%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4273	4233	4174	4098	3981	3837	3667	3465	3229	2969	2684	2361	2023	1672	1312	978	687	461	297	169	cd
100%	99%	98%	96%	93%	90%	86%	81%	76%	69%	63%	55%	47%	39%	31%	23%	16%	11%	7%	4%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
4273	4233	4174	4098	3981	3837	3667	3465	3229	2969	2684	2361	2023	1672	1312	978	687	461	297	169	cd
100%	99%	98%	96%	93%	90%	86%	81%	76%	69%	63%	55%	47%	39%	31%	23%	16%	11%	7%	4%	of 0°val

UGR Table

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

Reflectances		70	70	50	50	30	70	70	50	50	30
	ρ Ceiling	70	70	50	50	30	70	70	50	50	30
	ρ Walls	50	30	50	30	30	50	30	50	30	30
	ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
	X Y										
2H	2H	28.9	30.1	29.2	30.5	30.8	30.4	31.7	30.7	32.0	32.3
	3H	30.0	31.3	30.5	31.6	31.9	32.0	33.3	32.5	33.6	33.9
	4H	30.5	31.7	31.0	32.0	32.4	32.8	34.0	33.2	34.3	34.6
	6H	30.9	32.0	31.3	32.3	32.7	33.5	34.6	33.8	34.9	35.3
	8H	31.0	32.1	31.4	32.4	32.9	33.8	34.8	34.2	35.2	35.6
	12H	31.1	32.1	31.5	32.5	33.0	34.1	35.1	34.5	35.5	36.0
4H	2H	29.5	30.7	30.0	31.1	31.4	30.7	32.0	31.2	32.3	32.6
	3H	31.0	32.0	31.4	32.4	32.8	32.6	33.6	33.0	34.0	34.5
	4H	31.4	32.4	31.9	32.8	33.4	33.4	34.3	33.8	34.7	35.3
	6H	31.9	32.8	32.4	33.2	33.6	34.1	35.0	34.7	35.4	35.9
	8H	32.1	32.9	32.6	33.3	33.7	34.5	35.3	35.0	35.7	36.2
	12H	32.2	32.9	32.7	33.3	33.9	34.9	35.6	35.4	36.1	36.6
8H	4H	31.8	32.6	32.3	33.0	33.4	33.5	34.3	34.0	34.7	35.1
	6H	32.3	33.0	32.9	33.5	34.1	34.4	35.0	34.9	35.5	36.1
	8H	32.6	33.2	33.1	33.7	34.4	34.8	35.4	35.4	36.0	36.7
	12H	32.8	33.3	33.4	33.8	34.5	35.3	35.8	35.9	36.4	37.0
12H	4H	31.8	32.5	32.3	32.9	33.5	33.5	34.2	34.0	34.6	35.1
	6H	32.4	33.0	33.0	33.6	34.2	34.4	35.0	35.0	35.6	36.2
	8H	32.7	33.2	33.3	33.7	34.4	34.9	35.4	35.5	35.9	36.6
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.2 / -0.4					0.3 / -0.3				
S = 2.0H		0.5 / -0.7					0.7 / -0.7				

UGR-Daten konnten aufgrund fehlender/falscher Symmetrie nicht berechnet werden. Gehen Sie zu Bearbeiten -> Photometrisch -> Korrekturen und wählen Sie Asymmetrie korrigieren (UGR für asymmetrische Verteilungen nicht definiert)..

Coefficients of utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
RCR	(Room Cavity Ratio) Room values are expressed as percentage of Lumen delivered to the task surface																	
0	118.6	118.6	118.6	118.6	115.6	115.6	115.6	115.6	110.0	110.0	110.0	104.9	104.9	104.9	100.2	100.2	100.2	98.0
1	107.2	102.0	97.4	93.1	104.3	99.5	95.3	91.4	94.9	91.4	88.1	90.6	87.7	85.1	86.6	84.3	82.2	79.9
2	97.1	88.4	81.2	75.1	94.3	86.3	79.7	74.0	82.4	76.8	72.0	78.8	74.1	70.0	75.4	71.6	68.1	65.8
3	88.3	77.3	68.8	62.0	85.6	75.6	67.7	61.3	72.2	65.5	59.9	69.2	63.4	58.6	66.3	61.5	57.3	55.0
4	80.7	68.3	59.2	52.2	78.2	66.8	58.3	51.8	64.0	56.6	50.8	61.4	55.0	49.9	59.0	53.5	49.0	46.7
5	74.1	60.9	51.6	44.8	71.8	59.6	50.9	44.4	57.2	49.6	43.7	55.0	48.3	43.1	52.9	47.1	42.4	40.2
6	68.4	54.7	45.5	38.9	66.3	53.6	45.0	38.7	51.6	43.9	38.2	49.7	42.9	37.6	47.9	41.9	37.1	35.0
7	63.3	49.5	40.5	34.3	61.4	48.6	40.1	34.1	46.8	39.2	33.7	45.2	38.4	33.3	43.7	37.5	32.9	30.8
8	58.9	45.1	36.4	30.5	57.2	44.3	36.1	30.3	42.8	35.3	30.0	41.4	34.6	29.7	40.1	33.9	29.4	27.4
9	55.0	41.4	33.0	27.4	53.5	40.7	32.7	27.2	39.4	32.1	27.0	38.1	31.5	26.7	37.0	30.9	26.5	24.6
10	51.5	38.1	30.1	24.7	50.1	37.5	29.8	24.6	36.4	29.3	24.4	35.3	28.8	24.2	34.3	28.3	24.0	22.2

Power details

Input power

Frequency of input power	0.0 Hz
Power feed to light source	0 W
RMS Input voltage feed V,RMS	0 V
RMS Input current feed I,RMS	0.10 A
Volt-Amp or apparent power = V,RMS*I,RMS	0.0 VA
Displacement factor of AC power feed	0.00
Power factor of AC current feed	0.00
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve



Efficiency

Radiated power efficiency	∞
Lumen efficiency	∞ lm/W

Stabilization details

Warmup Conditions

Stable period	3 Min
Stable change max	3%
Minimum time	3 Min

Color Temperature Change

CCT start	3001 K
CCT shift	-1 K
CCT end	3000 K


Warmup Result

Total warmup time	Nicht vollständig
Warmup variation	-0.434%

Output Change

Output start	13.41 lm
Output change	-36.355 lm
Output end	13.38 lm

Stabilization Curve

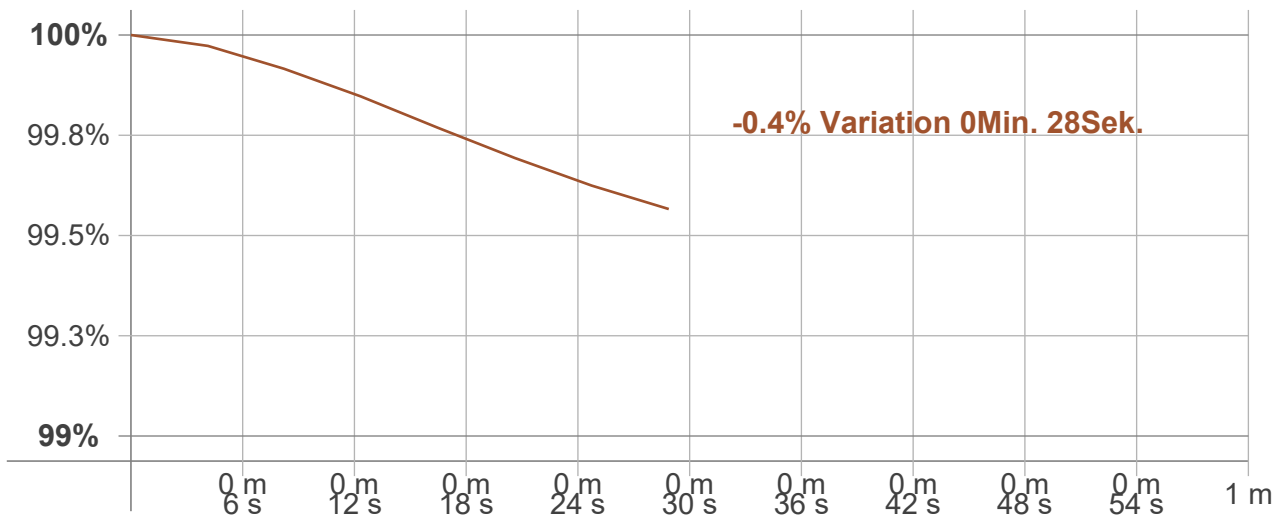

Flicker TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	0.0 Hz	PstLM	180 sec.
Flicker/TLA sample rate	NaN samples/s	All other indices	1,5 sec,

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency	NaN Hz
Percent Flicker	NaN %
Flicker index	NaN

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz	NaN %
JA8/10 90 Hz	NaN %
JA8/10 200 Hz	NaN %
JA8/10 400 Hz	NaN %
JA8/10 1000 Hz	NaN %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value (F < 80 Hz)	NaN
SVM value (80 < F < 2000 Hz)	NaN


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp	NaN
------------------------------	-----

Flicker frame (frame of one flicker period in time domain)

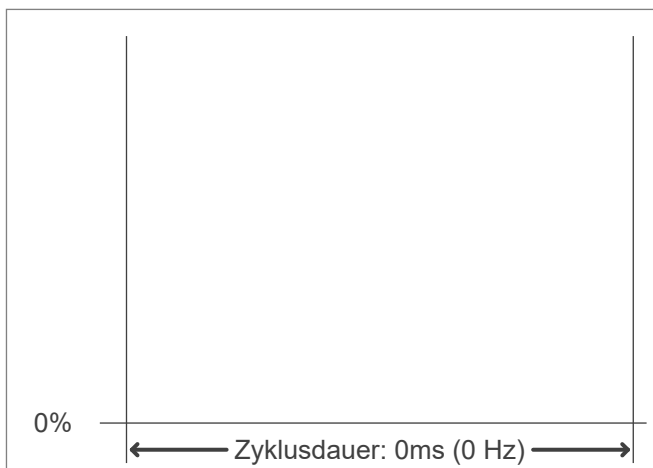

Flicker FFT (flicker curve in frequency domain)

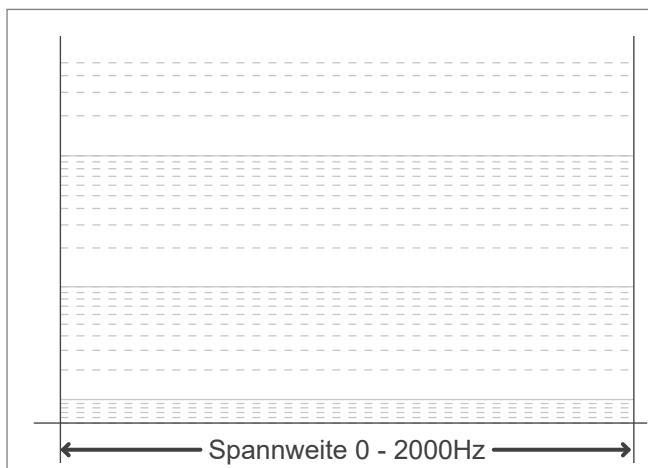

IEEE 1789 Frequency/modulation plot

