

Test report

Light measurement results

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date

Viso LightSpion - Seriennummer: 1435906163
LightSpion – Type C, horizontal
11.11.2025

Measurement Conditions

Tested c-planes
Tested gamma resolution
Input Power
Input RMS Voltage and Current

2 planes – 180°
7.5°
14.4 W
24.0 V – 0.598 A

Tested Light Source

Luminaire
Item No.
Manufacturer
Measured length
Dimension (Lamp w x h) | (Light w x h)
Description

FLEX STRIP HEP-800 MONO 14.4W WW 1m 251108
AS08HEP1406
awLed by audiowerk GmbH
1000mm
10mm x 1000mm | 3.5mm x 2.8mm
Charge: 251108


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index
Ecodesign Energy Class

2542 lm – 2% / 98%
177 lm/W
834 cd
3086 K
CRI 91.7
C

Polar light distribution diagram


Unit: 0-100% of peak intensity

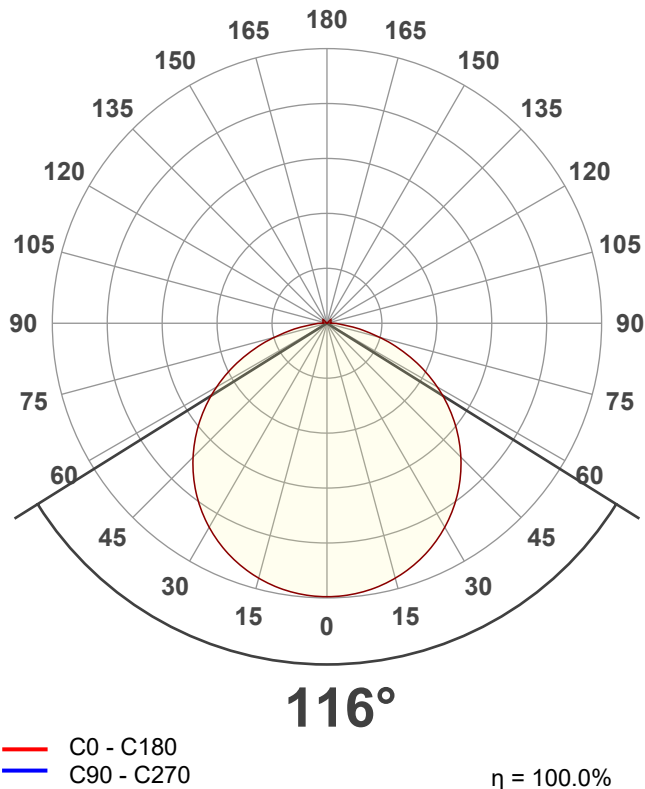

Product photo



Spectral power distribution

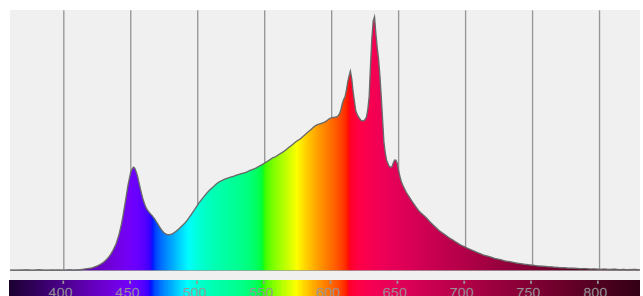


Test report

Light measurement results

Luminous Intensity diagram

Unit: 0-100% of peak intensity

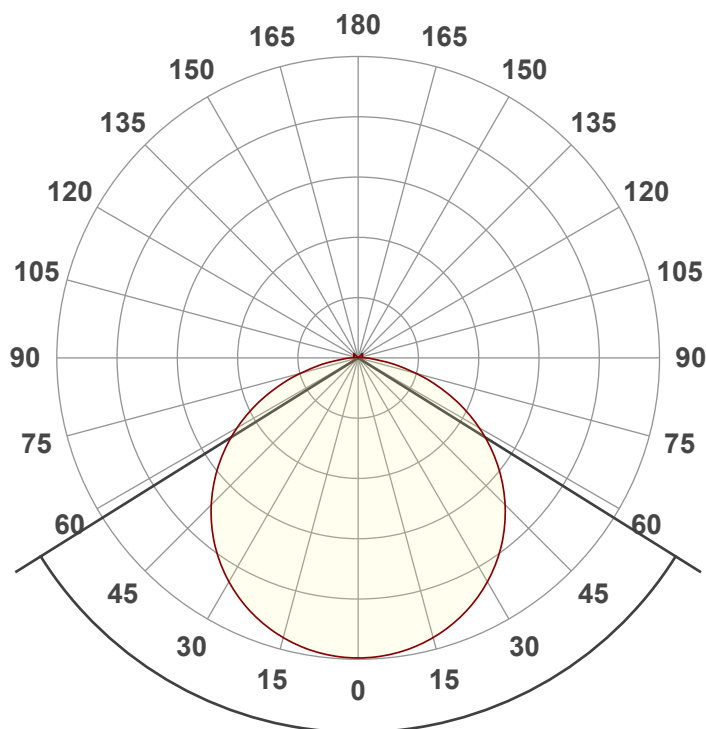

C0-C180
C90-C270

116°

Main Values

Output (total Lumen)	2542 lm
Lumen Up% / Down%	2.32% / 97.68%
Peak Intensity	834 cd
Beam Angle (50%-FWHM)	115.97°

EU Ecodesign parameters


Directionality (DLS or NDLS)	NDLS
Ecodesign Useful Luminous	2542 lm
Ecodesign Energy Class	C

Intensity Ratio

In 120° cone	75.9%
In 90° cone	51.2%

Linear distribution diagram

Intensity [cd]

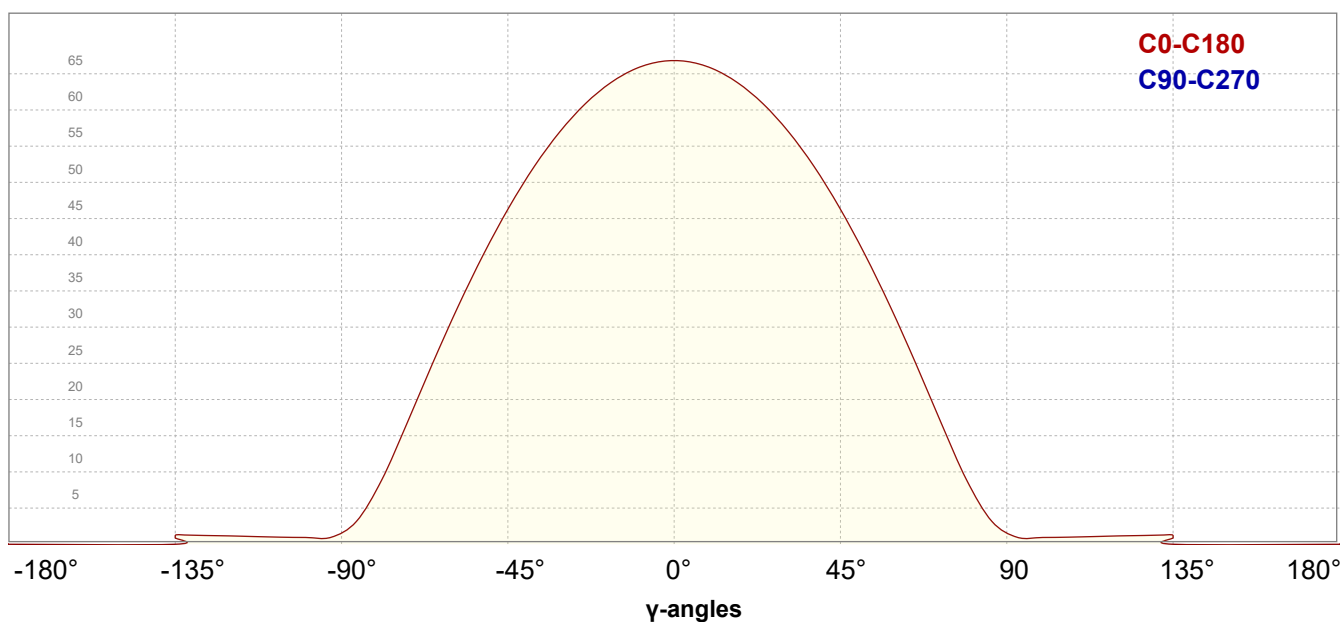

C0-C180
C90-C270

Test report

Light measurement results

Color details


Correlated Color Temperature, Target
Correlated Color Temperature, Measured
Color Rendering Index
Color Rendering Index, R9 (red)
Color Rendering TM30-18

CCT = 3086 K
CCT = 3086 K
CRI 91.7
R9 = 47.5
Rf 90.2
Rg 98.4


MacAdam Steps
Color deviation from BBL
Color coordinates CIE 1931
Color coordinate CIEs 1960
Color coordinate CIEs 1976
Color Quality Scale

SDCM = n/a
Duv = 0.0004
(x;y) = (0.432;0.403)
(u;v) = (0.248;0.347)
(u';v') = (0.248;0.520)
CQS = 89.8


CIE 1931 Chromaticity diagram

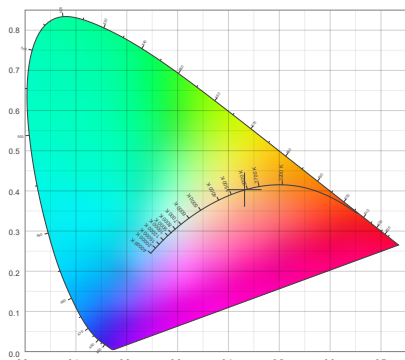


CIE 1931 Chromaticity - zoomed

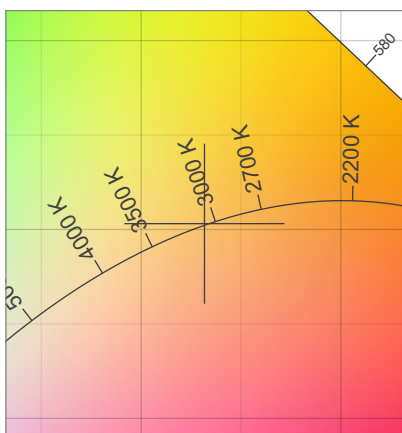


CIE 1931 Chromaticity - SDCM

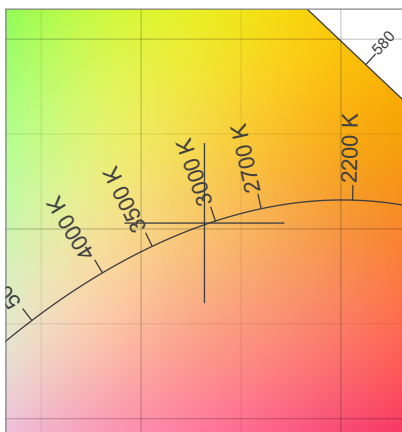

Spectral power distribution

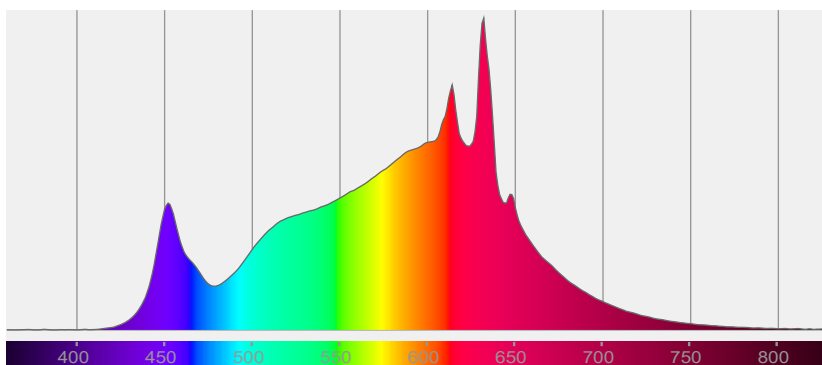


Color Rendering Index per reference color (CIE 1995)

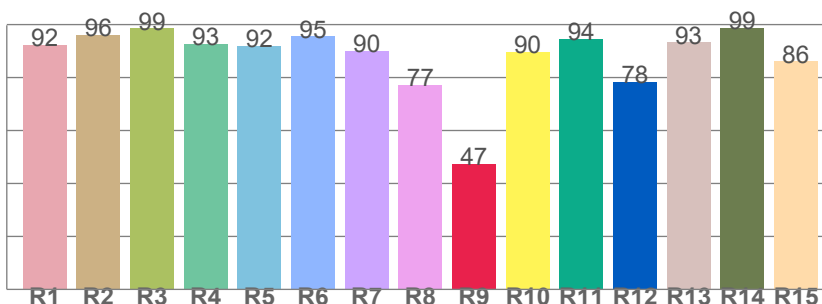

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.2	96.0	98.5	92.6	91.9	95.5	90.0	77.3	47.5	89.7	94.4	78.3	93.2	98.7	86.1

TM30-18 Rf-values per hue bin

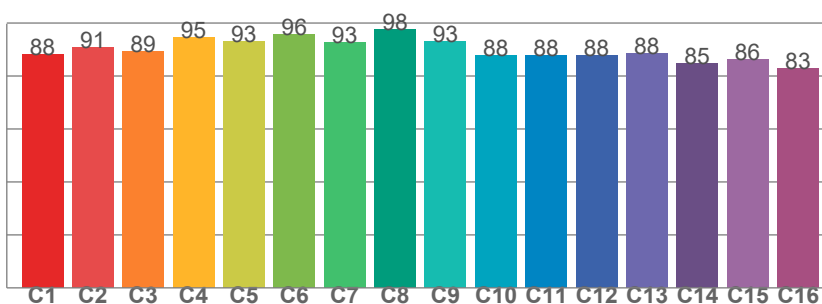


TM30-18 Rf-values per hue bin

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
88.2	90.7	89.2	94.7	93.0	95.7	92.7	97.6	93.1	87.8	87.7	87.7	88.5	84.6	86.2	82.9

Color details - ANSI/IES TM-30-18 Color Rendition Report


Color Vector Graphic

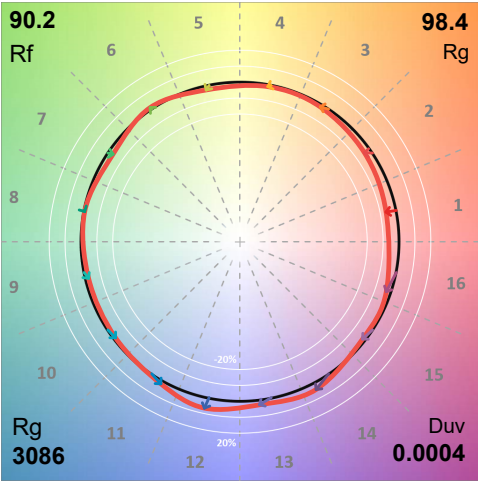


Color Distortion Graphic




Gamut Index vs. Fidelity Index

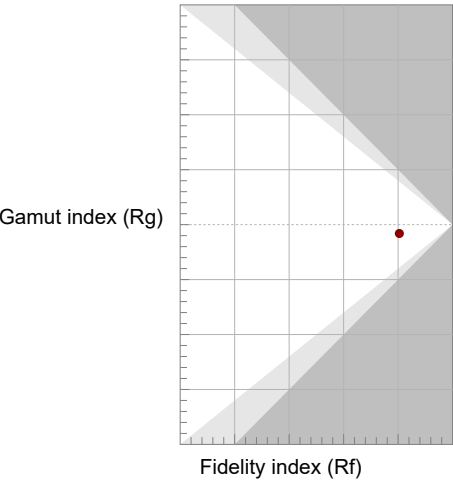


Color Rendition by Color Evaluation Sample (CES)

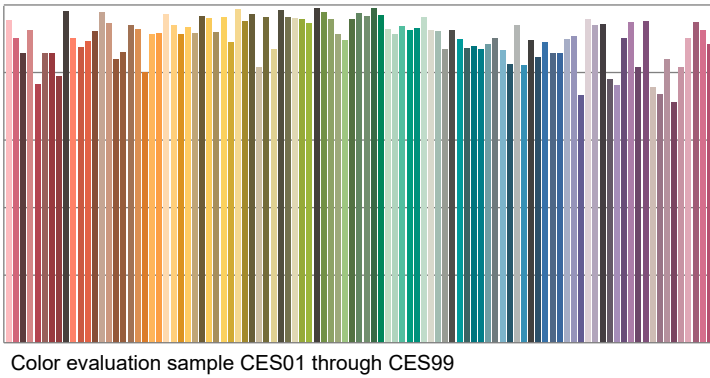

Local Color Fidelity (per hue bin)

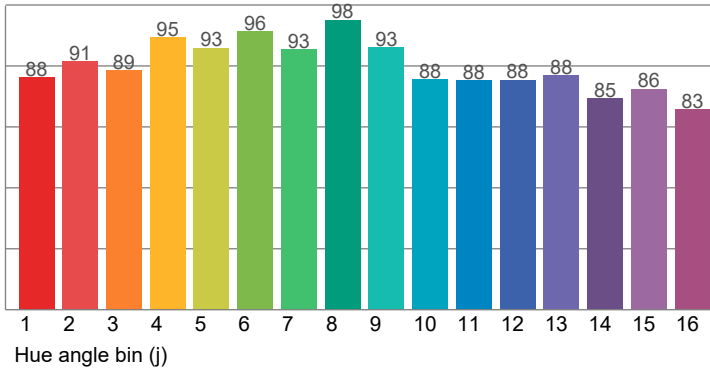

Local Chroma Shift (per hue bin)

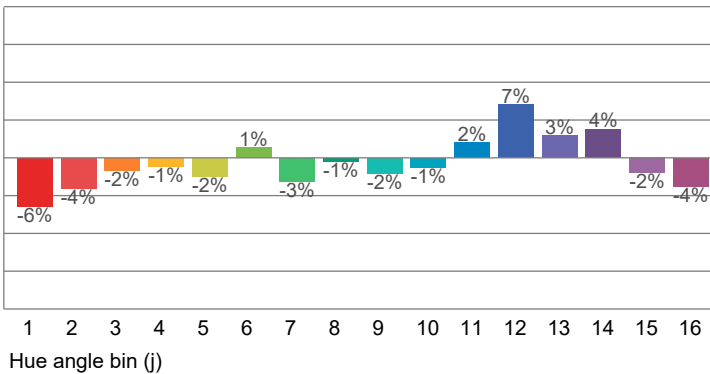

CIE x 0.432
CIE y 0.403
CIE u' 0.248
CIE v' 0.520


CIE 13.3-1995

Ra 91.7
R9 47.5

Test report


Light measurement results

Beam details

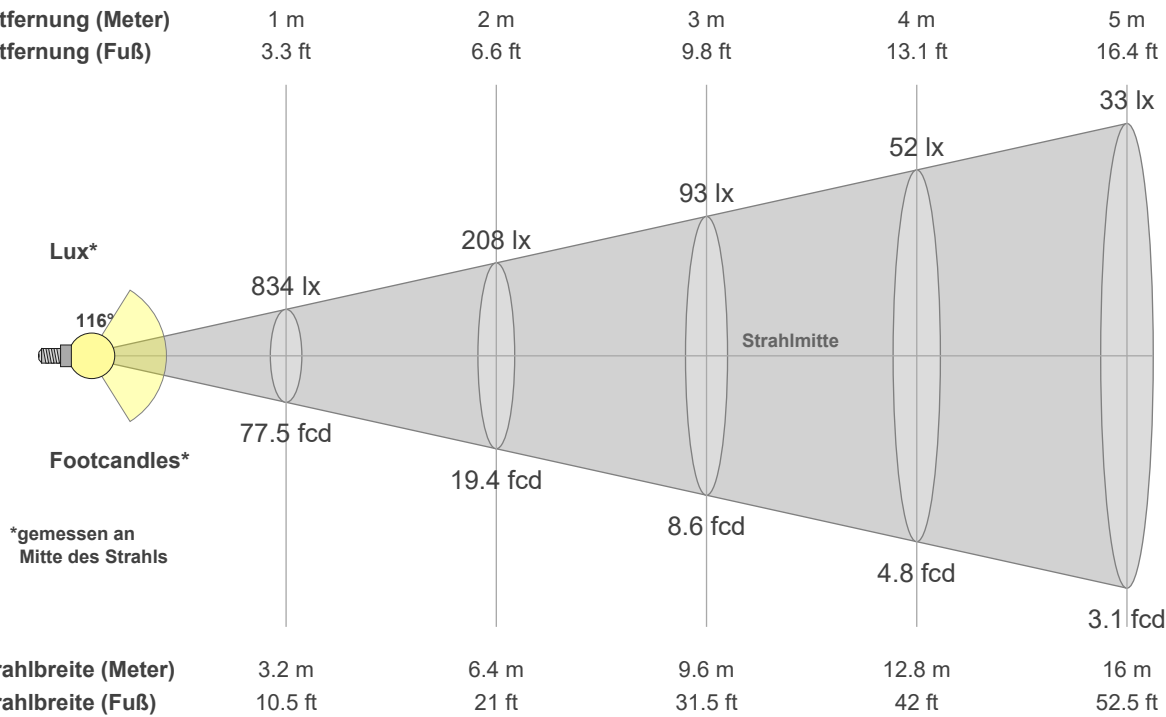

Luminaire budgetary diagram

LAMPS (number of lamps)

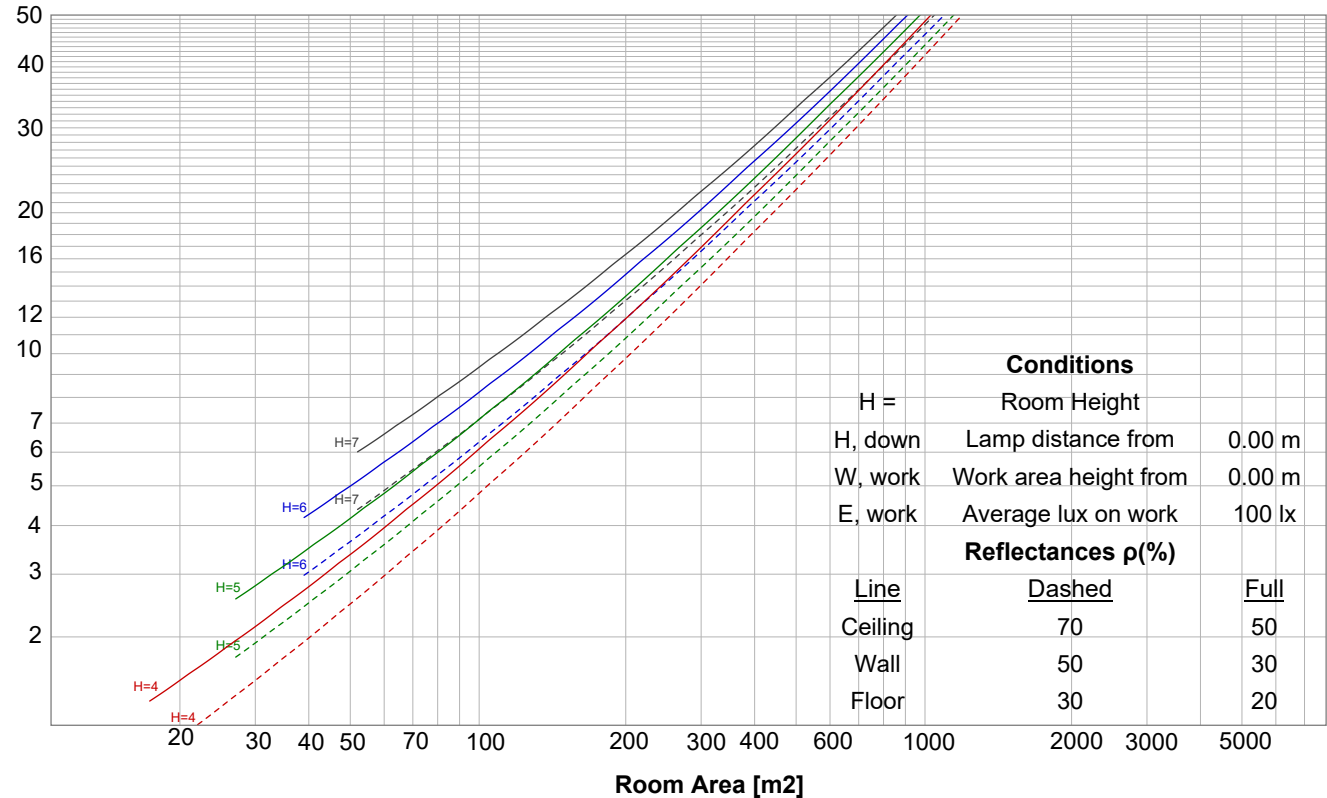

Test report

Light measurement results

Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
834	208	93	52	33	23	17	13	10	8	7	6	5	4	4	3	3	3	2	2	lux
77.5	19.4	8.6	4.8	3.1	2.2	1.6	1.2	1	0.8	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.2	0.2	0.2	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
834	831	822	805	782	754	719	677	630	578	519	456	389	318	243	170	102	50	23	12	cd
100%	100%	99%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	6%	3%	1%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
834	831	822	805	782	754	719	677	630	578	519	456	389	318	243	170	102	50	23	12	cd
100%	100%	99%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	6%	3%	1%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
834	831	822	805	782	754	719	677	630	578	519	456	389	318	243	170	102	50	23	12	cd
100%	100%	99%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	6%	3%	1%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
834	831	822	805	782	754	719	677	630	578	519	456	389	318	243	170	102	50	23	12	cd
100%	100%	99%	97%	94%	90%	86%	81%	76%	69%	62%	55%	47%	38%	29%	20%	12%	6%	3%	1%	of 0°val

Test report

Light measurement results

UGR Table

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

Reflectances			ρ Ceiling	70	70	50	50	30	70	70	50	50	30
			ρ Walls	50	30	50	30	30	50	30	50	30	30
			ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size			Viewed Crosswise						Viewed Endwise				
H = mounting height above eye level			(Viewing direction orthogonal to lamp length axis)						(Viewing direction parallel to lamp length axis)				
X		Y											
2H	2H		28.9	30.0	29.1	30.4	30.7	30.4	31.6	30.6	31.9	32.2	
	3H		29.9	31.2	30.4	31.5	31.7	31.8	33.1	32.3	33.4	33.7	
	4H		30.3	31.5	30.7	31.8	32.1	32.5	33.7	32.9	34.0	34.3	
	6H		30.6	31.6	30.9	32.0	32.4	33.0	34.1	33.4	34.4	34.8	
	8H		30.6	31.6	31.0	32.0	32.4	33.2	34.2	33.6	34.5	35.0	
	12H		30.6	31.6	31.0	32.0	32.5	33.3	34.3	33.7	34.7	35.2	
4H	2H		29.4	30.6	29.9	31.0	31.3	30.7	31.8	31.1	32.2	32.5	
	3H		30.8	31.8	31.2	32.1	32.6	32.4	33.4	32.8	33.8	34.3	
	4H		31.2	32.1	31.7	32.6	33.1	33.0	34.0	33.5	34.4	35.0	
	6H		31.5	32.4	32.0	32.8	33.2	33.6	34.5	34.1	34.9	35.3	
	8H		31.6	32.4	32.1	32.8	33.2	33.8	34.6	34.3	35.0	35.4	
	12H		31.6	32.3	32.1	32.7	33.3	34.0	34.6	34.5	35.1	35.6	
8H	4H		31.4	32.2	32.0	32.6	33.1	33.1	33.9	33.7	34.3	34.8	
	6H		31.8	32.5	32.4	33.0	33.6	33.8	34.4	34.3	34.9	35.5	
	8H		32.0	32.5	32.5	33.1	33.8	34.1	34.6	34.6	35.2	35.8	
	12H		32.1	32.5	32.7	33.1	33.7	34.3	34.8	34.9	35.3	35.9	
12H	4H		31.4	32.1	32.0	32.6	33.1	33.1	33.8	33.6	34.2	34.8	
	6H		31.9	32.4	32.4	33.0	33.7	33.8	34.3	34.4	34.9	35.6	
	8H		32.0	32.5	32.6	33.0	33.7	34.1	34.5	34.7	35.1	35.7	
Variations with the observer position for the luminaire spacings, S:													
S = 1.0H			0.1 / -0.2						0.1 / -0.1				
S = 1.5H			0.3 / -0.5						0.3 / -0.4				
S = 2.0H			0.6 / -0.9						0.9 / -0.9				

UGR-Daten konnten aufgrund fehlender/falscher Symmetrie nicht berechnet werden. Gehen Sie zu Bearbeiten -> Photometrisch ->

Coefficients of utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
RCR	(Room Cavity Ratio)				Room values are expressed as percentage of Lumen delivered to the task surface													
0	118.5	118.5	118.5	118.5	115.5	115.5	115.5	115.5	109.8	109.8	109.8	104.7	104.7	104.7	99.9	99.9	99.9	97.7
1	107.9	103.0	98.6	94.6	104.9	100.5	96.5	92.8	95.8	92.5	89.5	91.5	88.8	86.3	87.5	85.3	83.3	81.1
2	97.9	89.5	82.5	76.7	95.0	87.4	81.0	75.6	83.5	78.1	73.4	79.8	75.3	71.4	76.4	72.8	69.5	67.2
3	89.1	78.4	70.1	63.5	86.4	76.6	68.9	62.7	73.3	66.7	61.3	70.2	64.6	60.0	67.3	62.7	58.6	56.3
4	81.5	69.3	60.4	53.6	79.0	67.8	59.5	53.1	65.0	57.8	52.1	62.4	56.1	51.1	59.9	54.6	50.2	47.9
5	74.8	61.8	52.7	46.0	72.5	60.5	52.0	45.6	58.1	50.6	44.9	55.9	49.3	44.2	53.8	48.1	43.5	41.3
6	69.0	55.6	46.5	40.0	66.9	54.5	45.9	39.7	52.4	44.8	39.2	50.5	43.8	38.6	48.7	42.8	38.1	36.0
7	64.0	50.3	41.4	35.2	62.1	49.4	41.0	35.0	47.6	40.1	34.6	45.9	39.2	34.2	44.4	38.4	33.8	31.7
8	59.5	45.8	37.2	31.3	57.8	45.0	36.9	31.2	43.5	36.1	30.8	42.1	35.4	30.5	40.7	34.7	30.2	28.2
9	55.5	42.0	33.7	28.1	54.0	41.3	33.4	28.0	40.0	32.8	27.7	38.7	32.2	27.5	37.6	31.6	27.2	25.3
10	52.0	38.7	30.8	25.5	50.6	38.1	30.5	25.4	37.0	30.0	25.1	35.9	29.4	24.9	34.8	28.9	24.7	22.9

Test report


Light measurement results

Power details

Input power

Frequency of input power	0 Hz
Power feed to light source	14.4 W
RMS Input voltage feed V,RMS	24.0 V
RMS Input current feed I,RMS	0.598 A
Volt-Amp or apparent power = V,RMS*I,RMS	14.36 VA
Displacement factor of AC power feed	0.0
Power factor of AC current feed	1.0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve



Efficiency

Radiated power efficiency 54.3%

Lumen efficiency 177 lm/W

Stabilization details

Warmup Conditions

Stable period	3 Min
Stable change max	2.0%
Minimum time	3 Min

Color Temperature Change

CCT start	3087 K
CCT shift	-1 K
CCT end	3086 K


Warmup Result

Total warmup time	Lampe
Warmup variation	+0.9%

Output Change

Output start	2524 lm
Output change	+18 lm
Output end	2542 lm

Stabilization Curve

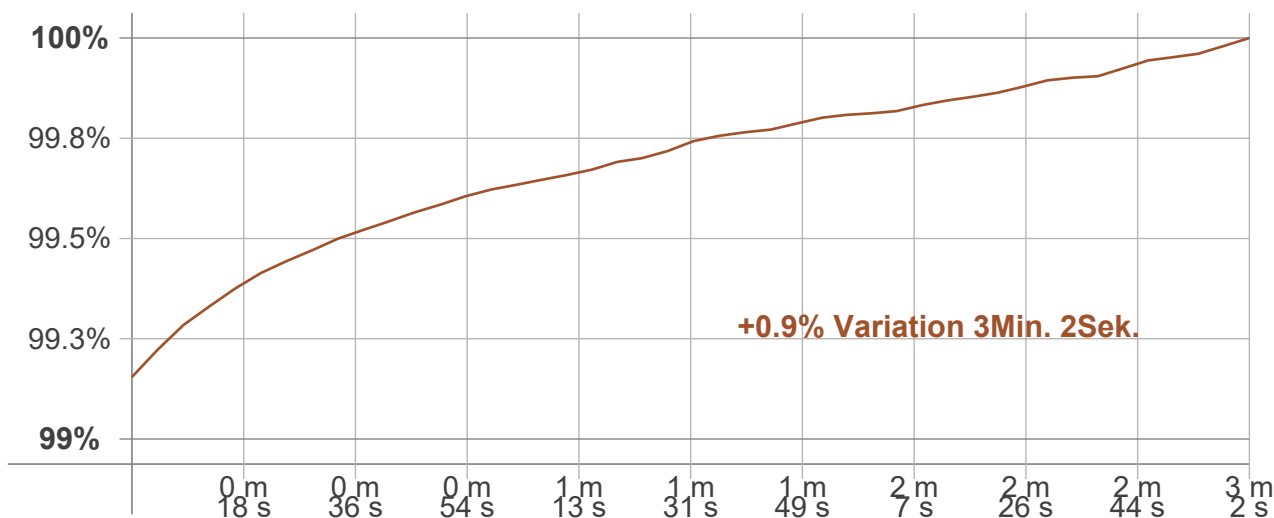

Flicker TLA details

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 0 Hz
Flicker/TLA sample rate n/a samples/s

Measurement time
PstLM 180 sec.
All other indices 1,5 sec,

Flicker indices according to Illuminating Engineering Society

Flicker frequency n/a Hz
Percent Flicker n/a %
Flicker index n/a

Flicker indices according to California Energy Commission (CEC)

JA8/10 40 Hz n/a %
JA8/10 90 Hz n/a %
JA8/10 200 Hz n/a %
JA8/10 400 Hz n/a %
JA8/10 1000 Hz n/a %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC

PstLM value ($F < 80$ Hz) n/a
SVM value ($80 < F < 2000$ Hz) n/a


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp n/a

Flicker frame (frame of one flicker period in time domain)

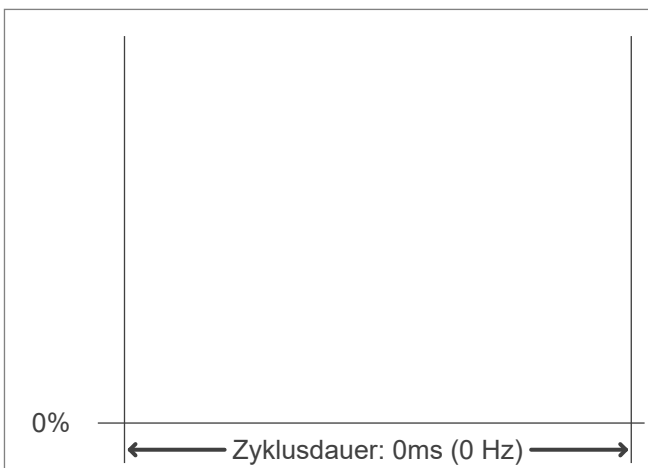

Flicker FFT (flicker curve in frequency domain)

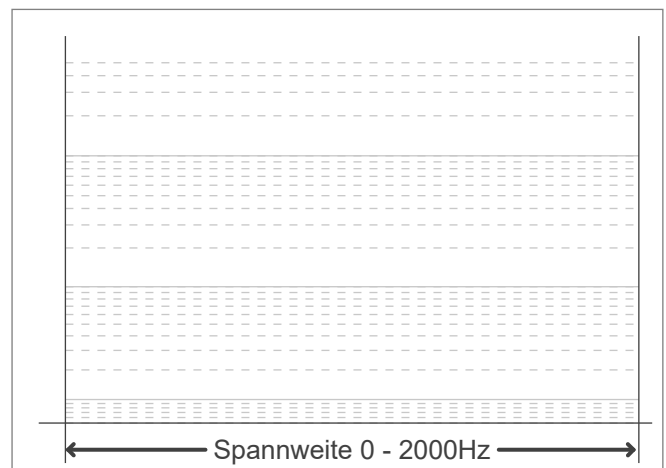

IEEE 1789 Frequency/modulation plot

